



## Conneq mini-loaders: Efficient, flexible and intuitive

From construction to paving; from demolition to trenching: mini-loaders make physical work as easy as possible. These powerful machines get any job done with lasting results. Multifunctional in the broadest sense of the word, because with over 70 (!) suitable attachments, the possibilities are endless. Efficient, flexible and intuitive to use: this is how Conneq mini-loaders make a difference to any project.



## 7 Reasons

Why you should choose Conneq loaders:



### Strong

Load capacity up to 500 kg



### Smooth

Very precise steering and pivoting



### Efficient

Speed up to 12 km/h



### Multifunctional

Numerous applications from up to 70 attachments



### Ergonomic design

User-friendly design



### Quiet

No significant noise, comfortable to work



### Sustainable

Powerful lithium batteries that last a day with ease



# AS15

## Specifications

### Driveline

Type	ACPM synchronous motors on each wheel
Total power [kW]	10,8
Speed[km/h]	12
Brakes	Regenerative and parking brake

### Hydraulics

Power [kW]	5,2
Pressure [bar]	180
Speed [rpm]	0 - 3000
Flow rate [L/min]	24
Oil capacity [L]	35

### Battery


Voltage [V]	48
Capacity (3) [kWh]	8,7
Capacity (5) [kWh]	14,5
Capacity (7) [kWh]	20,3
Operation hours* [hour]	8-10

\* assuming 5 batteries


### Capacity

Maximum lift [Kg]	500
Pushing force [Kg]	715 <i>provisional</i>

Tipping  
load\* \*\*

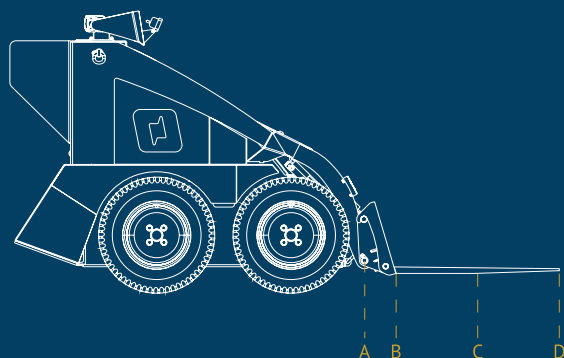

A	-	Kg
B	745	Kg
C	500	Kg
D	440	Kg

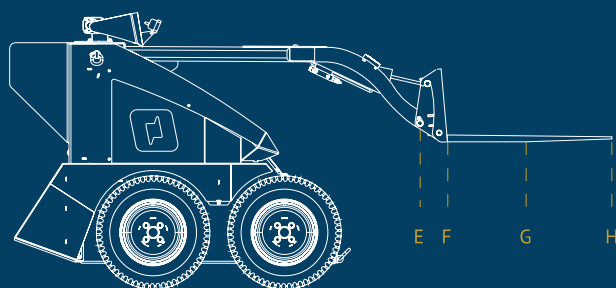

E	660	Kg
F	500	Kg
G	270	Kg
H	255	Kg



\* incl. pallet forks 800 mm / 45 kg

\*\* incl. operator ± 70 kg



# AS15


## Dimensions

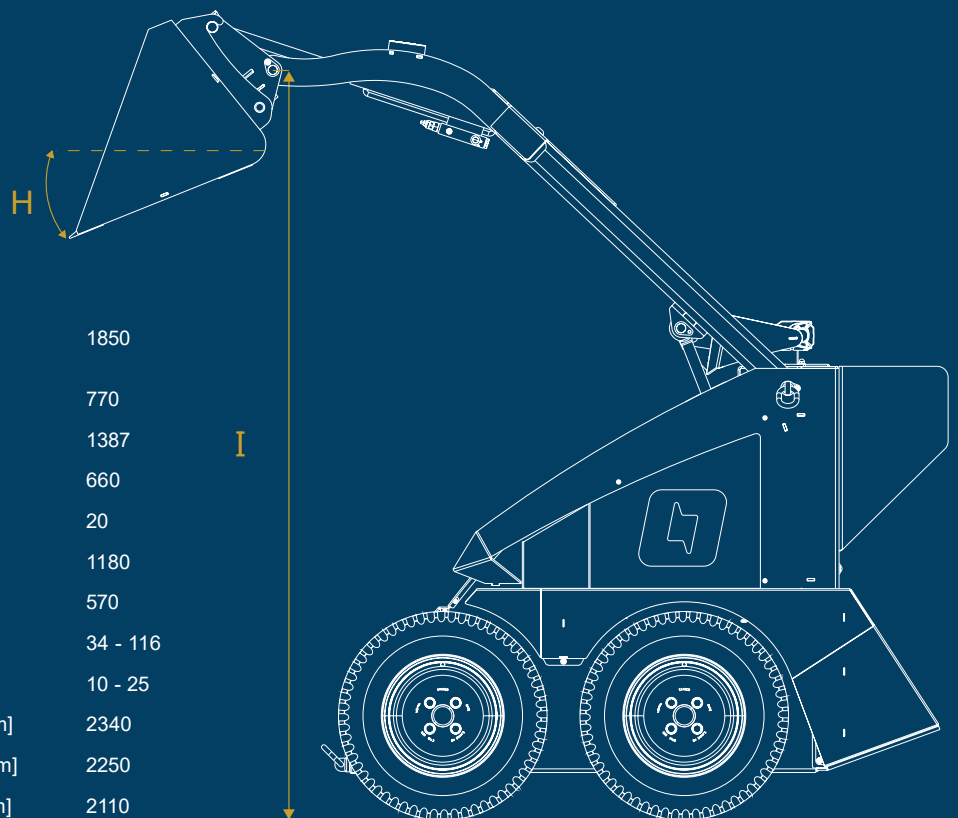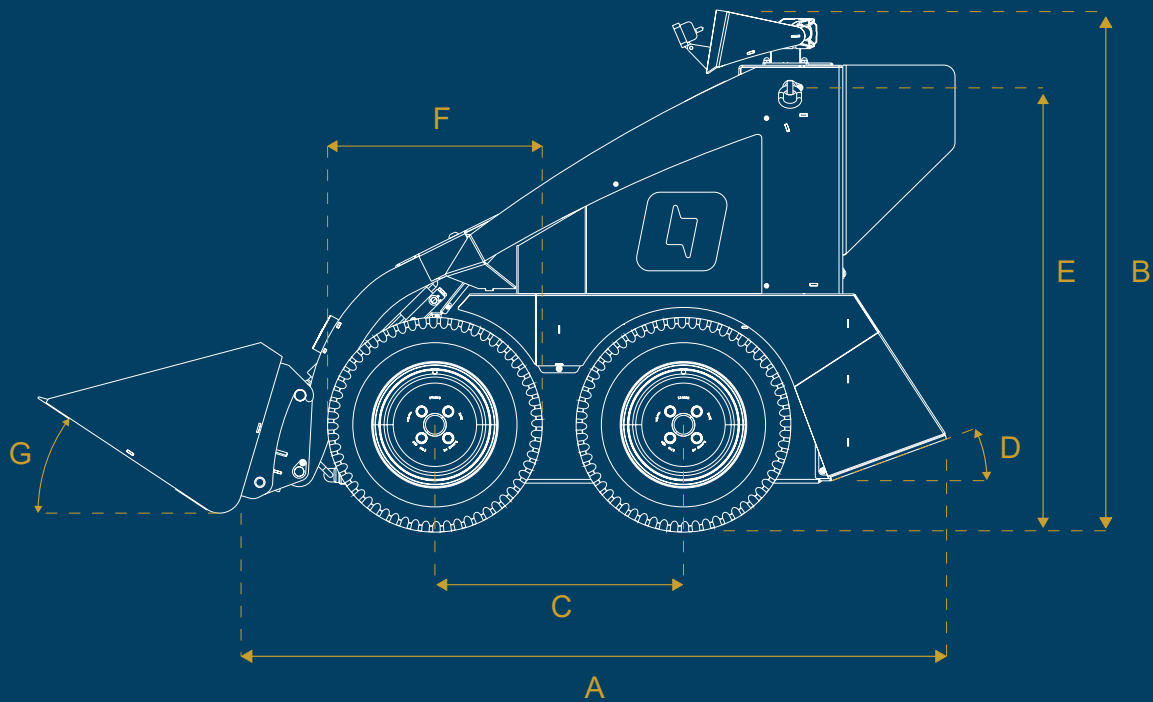

<b>A</b>	Machine length [mm] <i>excluding attachment</i>	1850
—	Machine width * [mm]	770
<b>B</b>	Machine height * [mm]	1387
<b>C</b>	Wheelbase [mm]	660
<b>D</b>	Incline angle [°]	20
<b>E</b>	Pivot height boom [mm]	1180
<b>F</b>	Wheel diameter [mm]	570
<b>G</b>	Backangle min/max [°]	34 - 116
<b>H</b>	Tipping angle min/max [°]	10 - 25
<b>I</b>	Pivot height coupling plate [mm]	2340
—	Lift height with pallet forks [mm]	2250
—	Lift height with soil bucket [mm]	2110
—	Weight [Kg] <i>excluding attachment</i>	900

\* *with standard tires*

*Subject to technical alterations. No rights may be derived from this information.*

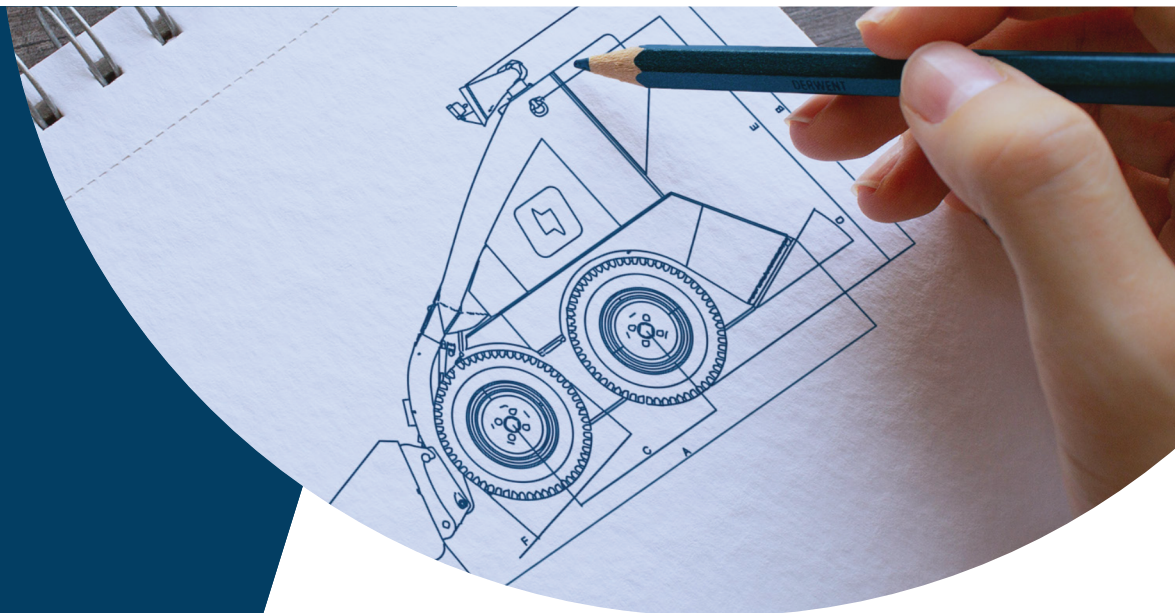

# Product development

## from *scratch*

Innovation requires an integral view: everything is important. We are thorough in everything we do, and pay attention to every detail. We use this information to fuel product development, and take nothing for granted. Controls, design, safety, lighting, ease of use, maintenance: everything is scrutinised creatively. Because this gives us space to really do things differently. An original idea only gains value once it provides added value in practice. That's why we are vigorous in our testing and continuous developing. This is how we are able to offer products that have been proven to be effective, and continue to surprise our customers.



Want to know more about the possibilities?  
Check our website [www.conmeq.com](http://www.conmeq.com) for more info



+31 (0)85 06 420 40



[info@conmeq.com](mailto:info@conmeq.com)



Luchthavenweg 4  
6021 PX Budel  
Nederland