


HG6000

HORIZONTAL GRINDER

EU CONFIGURATION

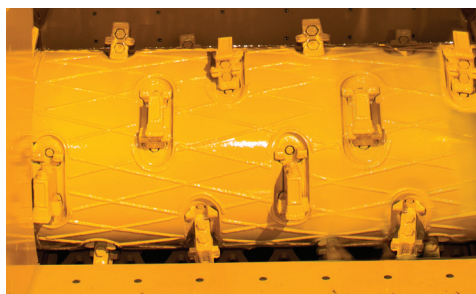


OPTIMAL CUTTING PERFORMANCE. The new Series III duplex drum is built off the proven cutting performance of previous Vermeer duplex drum designs, and makes maintenance more convenient with enhancements such as an independently secured wedge system and enhanced drum balancing.



CHIP PRODUCTION. The optional chip drum produces a consistently chipped end product, rather than traditional shredded material, for uses such as biofuel.



PROGRESSIVE PROCESSING. The patented SmartFeed system monitors engine rpm and adjusts grinding speed to increase productivity. The open-ended, wide infeed table makes material loading easy and efficient.

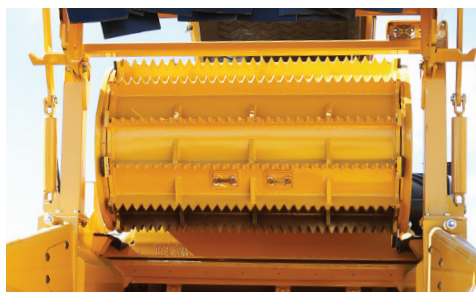

ENHANCED INFEED. The feed roller planetary is fully enclosed for protection from debris and offers a tighter clearance between the feed roller and mill housing, helping reduce material blockage and drag on the feed roller circuit.



JOB SITE SAFETY. The Thrown Object Deflector (TOD) reduces the amount and distance of thrown material debris, while also reducing interference when loading over-length material.



ENGINE POWER. The HG6000 offers engine options to meet the demands of your operation as well as those set by governmental regulations.

HG6000 HORIZONTAL GRINDER EU CONFIGURATION

GENERAL WEIGHTS AND DIMENSIONS

Max transport length: 11,8 m (38.8')

Max transport width: 2,5 m (8.2')

Max transport height: 4 m (157.5')

Weight: 30,844.3 kg (68,000 lb)

ENGINE

Make and model: Caterpillar C18 Tier 4 Final (Stage IV)

Max gross horsepower: 755 hp (563 kW)

Fuel tank capacity: 350 gal (1324.9 L)

INFEEED CONVEYOR

Feed table width: 152,4 cm (60")

Feed table length: 6,1 m (20')

INFEED ROLLER

Max feed height: 81.3 cm (32")

Diameter: 91.7 cm (36.1")

DUPLEX DRUM OPTION

Millbox opening: 152.4 cm x 81.3 cm (60" x 32")

Drum diameter: 71.1 cm (28")

Number of hammers: 10

Number of tips: 20

CHIP DRUM OPTION

Millbox opening: 152.4 cm (60")

Drum diameter: 87.1 cm (34.3")

Depth of cut: Ranging from 3.2 mm to 38.1 mm (.125" to 1.5")

Number of knives: 28

DISCHARGE SYSTEM

Belt length: 24,8 m (81.3')

Belt width: 121.9 cm (48")

Belt design: 3-ply – 330# or straight warp single-ply 330# both with V-cleat

Discharge height: 4,5 m (177.2")

HYDRAULIC SYSTEM

Tank capacity: 100 gal (378.5 L)

Implement pump type: Variable displacement, axial piston

Discharge conveyor pump: Fixed displacement, gear pump

CONTROLS

Stationary: Side-mounted LCD control station

Remote: Multifunction with built-in LCD display, max 91,4 m (300') operating range

OPTIONS

Vermeer Confidence Plus® asset protection program

NOTES:

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo, Equipped to Do More and Vermeer Confidence Plus are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Caterpillar is a trademark of Caterpillar Inc. © 2018 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.